




DESCRIPTION

- Rating load : Inductive load DC 12V, 10~250mA
- Applicable voltage range : DC 8V ~ DC 16V
- Applicable temperature range : -30°C ~ 120°C
- Applicable refrigerant : R-134a
- Insulation resistance : Min. 100M at DC 500V

Pressure	ON	OFF
High	32.0 ± 2.0	26.0 ± 2.0
Low	2.3 + 0.25 / -0.29	2.0 ± 0.2
Medium	15.5 ± 0.8	11.5 ± 1.2

LOW & HIGH

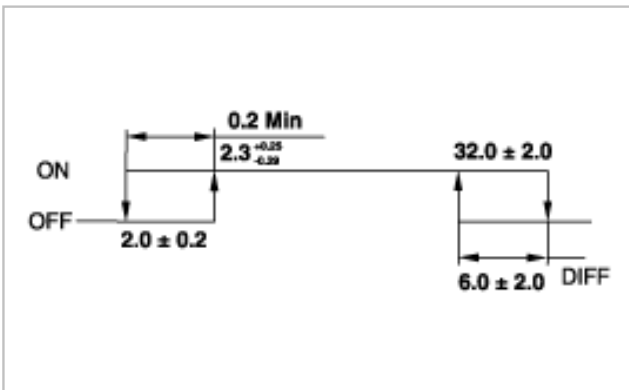

MEDIUM

